

## Anti Stick Rubber Mold Release Agent , Silicone Parts Mould Release Agent Low Friction

Our Product Introduction

### Basic Information

- Place of Origin: China
- Brand Name: Lubekote
- Model Number: xxxxx
- Minimum Order Quantity: None
- Price: 1-99 usd
- Packaging Details: 25L, 200L
- Delivery Time: 5-15 working days
- Payment Terms: T/T
- Supply Ability: 20T/week



### Product Specification

- Classification: Chemical
- Name: Silicone Rubber Mold Release Agent
- Brand Name: Lubekote
- Odor: Slight
- Place Of Origin: China
- Color: White
- Highlight: **Rubber Mold Release Agents Chemical, Mold Release Agents for Silicone Parts, Low Friction Silicone Mould Release Agent**

for more products please visit us on [shlorechem.com](http://shlorechem.com)

## Product Description

### Excellent Anti-Stick Rubber Mold Release Agent for Silicone Rubber Parts

Lubekote 9700S is a concentrated polymer solution for silica gel release agent, which has low friction and excellent release anti-stick properties. The release agent is mainly used for the release of various rubber products such as rubber die. It also has the same excellent demoulding effect on the surface of metal mold and non-metal mold.

#### Advantages:

Clean, colorless coating  
Does not contain any wax, stearic acid, silicone oil, etc  
No curing time required  
The coating is closely bonded to the surface and repeatedly demoulded  
Does not affect the future molding, printing, bonding and other operating processes  
Does not transfer to molded surfaces  
Not made of crepe stripes  
Keep the mold clean for a long time  
It is the ideal replacement of mica powder, talc powder, stearic acid, wax and silicone oil or emulsion

#### Application:

In order to obtain the best release effect, the mold surface should be the first to clean and dry, all previously used trace release agents should be cleaned, the usual brushing method can be used, such as spraying, scraping, brushing, spraying effect is better, it is best to heat the coating surface to more than 100 degrees spraying, the water completely and quickly evaporated. For the new mold, two layers of coating should be sprayed, the release agent should be brushed in each cycle in a timely manner within the first few cycles, when the mold reaches the ideal condition, one brushing can be applied to more a cycle. According to different processes can be diluted with deionized water 20-40 times or higher dilution ratio used.

#### Handling precautions:

For industrial use only.  
More release agent for Rubber Industry:

Application	Suitable code	Dispersing medium	Advantages
Antivibration	Lubekote 9421A/9140	Water based	Environmentally friendly; Can be diluted multiple times; It has strong durability and good releasing effect; Excellent performance of surface gloss; Cost-effective; Prolongs the mold cleaning cycle.
Antivibration	Lubekote 9526	Solvent based	It has strong durability and good releasing effect; Excellent performance of surface gloss; Economical dosage; Prolongs the mold cleaning cycle. Excellent performance of surface gloss; Cost-effective; Good performance on post process; Prolongs the mold cleaning cycle applied as both semi-permanent and highly diluted.
Antivibration	Lubekote 9425	Solvent based	It has strong durability and good releasing effect; Less build-up on molds; Cost-effective; Good performance on post process.
Hose	Lubekote 9240	Water based	Environmentally friendly; Excellent anti-tack agent for rollers, drums and autoclave vulcanisation operations
Hose	Lubekote 9808	Solvent based	Non greasy, non contaminating coating; Good releasing effect; Excellent performance of produced parts.
Belt	Lubekote 9836A	Water based	Environmentally friendly; Good releasing effect.
Belt	Lubekote 9328	Solvent based	Fast drying; Good releasing effect; Cost-effective.
Tire	Lubekote 9919	Water based	Semi-permanent lubricant system designed for coating of Bladders and touch up coats on Bladders or Green Tires; Easy to apply; Provides true multiple releases; Universal for all tires.
Tire	Lubekote 9502A/9503A	Water based	Semi-permanent water-based release agent applied on tire molds. The gloss level of part surface gloss is adjustable.
Silicone & Fluorine rubber	Lubekote 9165C	Water based	Applied for releasing hard-to-release rubber such as fluorine rubber ; Can be used as both semi-permanent and highly diluted. As semi-permanent it has strong durability and good releasing effect; Excellent performance of surface gloss; Cost-effective; Good performance on post process;





## Warehousing and logistics




It has nearly 5,000 square meters of cargo storage area. Eight employees work full-time in warehousing.



## Technical support



Making adjustment in the field

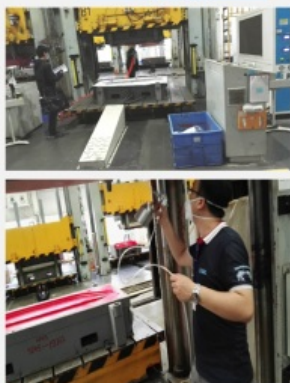

Shanghai Lorechem has a professional technical service team, whose members are specialized in polymer materials engineering. They have a wealth of field testing.

Testing in the field



Shanghai LoreChem Co., Ltd. was established in 2008. It is a high-tech enterprise which is dedicated to serve releasing products which involve semi-permanent release agent, anti-sticking, surface lubrication and thermal reactive adhesive. Shanghai LoreChem has been improving product quality for 15 years. The releasing products are mainly applied in rubber, polyurethane and composite industry. The brand of Lubekote for release agent and Thinkbond for adhesive have been registered in China. Both of them are well known in the industry.

Shanghai LoreChem's business is all over the domestic and foreign high-end production enterprises by providing professional technical solutions and services. The company's long-term goal is to become one of the best suppliers of release agent in Asia.



**Shanghai Lorechem Company Limited**



15901891635



export@lorechem.com



shlorechem.com

Floor 2-3, Building 20, Hongxing International Plaza, Lane 1818, Lianhang Road, Pujiang, Shanghai