

## High Performance Concrete Release Agent For Electrolytic Cell

Our Product Introduction

for more products please visit us on [shlorechem.com](http://shlorechem.com)

### Basic Information

- Place of Origin: China
- Brand Name: Lubekote
- Model Number: xxxxx
- Minimum Order Quantity: None
- Price: 1-99 usd
- Packaging Details: 25L, 200L
- Delivery Time: 5-15 working days
- Payment Terms: T/T
- Supply Ability: 20T/week




### Product Specification

- Classification: Chemical
- Name: Concrete Mold Release Agent
- Brand Name: Lubekote
- Odor: Slight
- Place Of Origin: China
- Application: Demolding For Resin Concrete
- Diluent: Solvent
- Highlight: **High Performance Concrete Release Agent ,  
Electrolytic Cell Concrete Release Agent ,  
solvent mould release agent**

## Product Description

### High Performance Concrete Release Agent for Electrolytic Cell

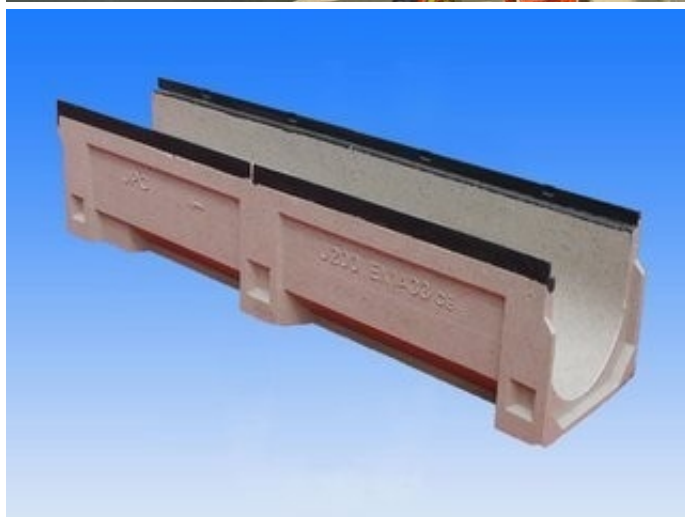

#### Application Field:

It is a lubricant and release system designed for resin concrete industry. It has shown excellent performance in releasing resin concrete parts. It can be diluted with solvent.

Application	Product	Advantages
Electrolytic cell	Lubekote 9023/9072/9043	Environmental protection and high performance, multiple demoulding, mold cleaning, secondary process
Gutter/drain pipe	Lubekote 9036L/9510/9289M	high cost performance, smooth demoulding, environmental protection without stimulation, protect the mold

#### Application:

The mold should be thoroughly cleaned.

Mold cleaning and release agent application should be performed in a well ventilated area.

1. Apply Lubekote release agent to clean, dry cotton cloth.
2. Gently wipe over mold surface covering an area of approximately 0,5 m<sup>2</sup>. Vigorous rubbing or polishing is not required.
3. Repeat steps 1 and 2 on the adjacent area. Ensure a good overlap with the previous area to provide complete coverage
4. Repeat until mold is completely coated.
5. When dry, allow a further 15 minutes between coats for the film to cure.
6. Repeat Steps 1- 5 above for a further 3 coats (4 in total).
7. When dry, allow final film to cure for at least 30 minutes at room temperature before molding. Allowing a longer cure or heat curing (e.g. 15 min. at 60 °C) will improve film durability



## Warehousing and logistics




It has nearly 5,000 square meters of cargo storage area. Eight employees work full-time in warehousing.



## Technical support



Making adjustment in the field

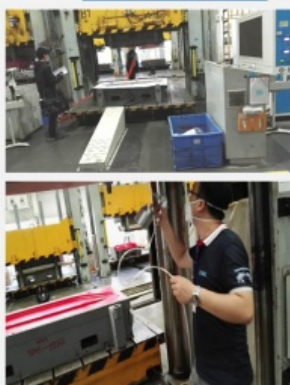

Shanghai Lorechem has a professional technical service team, whose members are specialized in polymer materials engineering. They have a wealth of field testing.

Testing in the field



Shanghai LoreChem Co., Ltd. was established in 2008. It is a high-tech enterprise which is dedicated to serve releasing products which involve semi-permanent release agent, anti-sticking, surface lubrication and thermal reactive adhesive. Shanghai LoreChem has been improving product quality for 15 years. The releasing products are mainly applied in rubber, polyurethane and composite industry. The brand of Lubekote for release agent and Thinkbond for adhesive have been registered in China. Both of them are well known in the industry.

Shanghai LoreChem's business is all over the domestic and foreign high-end production enterprises by providing professional technical solutions and services. The company's long-term goal is to become one of the best suppliers of release agent in Asia.

Reapply one coat of Lubekote release agent in the same way as described above when release becomes hesitant.

### Handling precautions:

For industrial use only.



Shanghai Lorechem Company Limited



15901891635



export@lorechem.com



shlorechem.com

Floor 2-3, Building 20, Hongxing International Plaza, Lane 1818, Lianhang Road, Pujiang, Shanghai